

FORM PTO-100 (Modified)
(REV 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371**

A-7419

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.5)

09/831355

INTERNATIONAL APPLICATION NO.

PCT/AU99/00795

INTERNATIONAL FILING DATE

20 September 1999 (20.09.99)

PRIORITY DATE CLAIMED

21 September 1998 (21.09.98)

TITLE OF INVENTION

METHOD FOR TREATING PRECIOUS METAL BEARING MINERALS

APPLICANT(S) FOR DO/EO/US

Michael HOURN; Rodrigo VENTURA; John WILLIS and David WINBORNE

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☐ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☐ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired
 - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☐ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/PEA/409).
12. ☒ A copy of the International Search Report (PCT/ISA/210).

Items 13 to 20 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☐ Certificate of Mailing by Express Mail
23. ☐ Other items or information:

U.S. APPLICATION NO. (IF KNOWN, SHOW 37 CFR 1.5) <div style="font-size: 24pt; font-weight: bold; text-align: center;">097831355</div>		INTERNATIONAL APPLICATION NO. <div style="font-weight: bold; text-align: center;">PCT/AU99/00795</div>		ATTORNEY'S DOCKET NUMBER <div style="font-weight: bold; text-align: center;">A-7419</div>	
--	--	---	--	--	--

24. The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) : <input checked="" type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1000.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$860.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$710.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$690.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00				CALCULATIONS PTO USE ONLY	
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$1,000.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492 (e)). <input type="checkbox"/> 20 <input type="checkbox"/> 30				\$0.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	24 - 20 =	4	x \$18.00	\$72.00	
Independent claims	3 - 3 =	0	x \$80.00	\$0.00	
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>				\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$1,072.00	
Applicant claims small entity status. (See 37 CFR 1.27). The fees indicated above are reduced by 1/2.					
SUBTOTAL =				\$1,072.00	
Processing fee of \$130.00 for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.492 (f)). <input type="checkbox"/> 20 <input type="checkbox"/> 30				\$0.00	
TOTAL NATIONAL FEE =				\$1,072.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input type="checkbox"/>				\$0.00	
TOTAL FEES ENCLOSED =				\$1,072.00	
				Amount to be: refunded	\$
				charged	\$

a. ☒ A check in the amount of **\$1,072.00** to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees. A duplicate copy of this sheet is enclosed.


c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. **08-2455** A duplicate copy of this sheet is enclosed.

d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.


SEND ALL CORRESPONDENCE TO:

Christopher J. McDonald, Esq.
 HOFFMAN, WASSON & GITLER, PC
 2361 Jefferson Davis Highway
 Suite 522
 Arlington, VA 22202
 (703) 415-0100



20741

PATENT TRADEMARK OFFICE


 SIGNATURE
Christopher J. McDonald
 NAME
41,533
 REGISTRATION NUMBER
May 14, 2001
 DATE

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the application of:

Michael HOURN; Rodrigo VENTURA;
John WILLIS and David WINBORNE

ATTN: PCT

Serial No:

Filed :

For : METHOD FOR TREATING PRECIOUS
METAL BEARING MINERALS

PRELIMINARY AMENDMENT

Commissioner of Patents and Trademarks
Washington, DC 20231

Sir:

Kindly amend the above-noted application in the
following manner:

In the Claims:

Please amend the claims as shown on the marked-up set
of claims and the replacement sheets of claims.

REMARKS

The claims have been changed to place the application
in conformance with U.S. practice. No new matter has been added.

Respectfully submitted,

by 
Christopher J. McDonald
Reg. 41,533

May 9, 2001

HOFFMAN, WASSON & GITLER, PC
2361 Jefferson Davis Highway
Suite 522
Arlington, VA 22202
(703) 415-0100

Attorney's Docket: A-7419.PAM/cat

CLAIMS:

1. A method of processing a mineral composition comprising a refractory material the method comprising milling the composition to a particle size of P_{80} of less than 25 microns and leaching said composition with a solution comprising lime and/or limestone in the presence of an oxygen containing gas.

2. The method of claim 1, wherein the refractory material is selected from the group comprising an iron containing sulfide ore, a refinery slime, a carbonaceous ore, a selenide and a telluride.

3. The method of claim 1, wherein the refractory material is selected from the group consisting of pyrite, marcasite, arsenopyrite, troilite, pyrrhotite, stibnite, tetrahedrite, argentopyrite, calaverite, altaite, gold bearing selenides, tennantite and pentlandite.

4. The method of claim ³, whereⁱon the refractory material is pyrite or arsenopyrite.

5. The method of claim 2, wherein the material is leached at atmospheric pressure.

6. The method of claim 5 wherein the material is leached in an open tank reactor.

7. The method of claim 2, wherein the material is leached at a temperature of about 50°C up to about the boiling point of the solution.

8. The method of claim 5, wherein the oxygen containing gas is oxygen and the oxygen is introduced into the leaching solution to a level of between about 200 to about 1000kg/tonne of solids in the leaching solution.

CLAIMS:

1. A method of processing a mineral composition comprising a refractory material the method comprising milling the composition to a particle size of P_{80} of less than 25 microns and leaching said composition with a solution comprising lime and/or limestone in the presence of an oxygen containing gas.

2. The method of claim 1, wherein the refractory material is selected from the group comprising an iron containing sulfide ore, a refinery slime, a carbonaceous ore, a selenide and a telluride.

3. The method of claim 1, wherein the refractory material is selected from the group consisting of pyrite, marcasite, arsenopyrite, troilite, pyrrhotite stibnite, tetrahedrite, argentopyrite, calaverite, altaite, gold bearing selenides, tennantite and pentlandite.

4. (Amended) The method of claim 3, wherein the refractory material is pyrite or arsenopyrite.

5. The method of claim 2, wherein the material is leached at atmospheric pressure.

6. The method of claim 5 wherein the material is leached in an open tank reactor.

7. The method of claim 2, wherein the material is leached at a temperature of about 50°C up to about the boiling point of the solution.

8. The method of claim 5, wherein the oxygen containing gas is oxygen and the oxygen is introduced into the leaching solution to a level of between about 200 to about 1000kg/tonne of solids in the leaching solution.

9. The method of claim 8, wherein the oxygen is introduced into the leaching solution at a flow rate of between about 0.1 to about 0.5vvm.

10. The method of claim 1, wherein the particle size is between about 2 to about 25 microns.

11. The method of claim 1, wherein the particle size is between about 5 to about 15 microns.

12. The method of claim 1, wherein the solution has a pH of the solution is between about 6 to about 12.

13. The method of claim 1, wherein the solution has a pH of between about 6 to about 9.

14. The method of claim 13, wherein the leach solution comprises a mixture of lime and limestone and wt% of limestone in the mixture is between about 40 to about 95%.

15. The method of claim 14, wherein the amount of lime and/or limestone added to the leach solution is between about 100 to about 1200kg/tonne of solids in the solution.

16. The method of claim 15, wherein the amount is about 800kg/tonne.

17. A method of recovering precious metals from a mineral composition comprising a refractory material, the method comprising:

grinding the material to a particle size of 80% passing 25 μ m or less;

leaching the ground material in the presence of lime and/or limestone and an oxygen containing gas; and

subjecting the leached material to a further leaching step to recover any precious metals.

18. The method of claim 17, wherein the refractory material is a refractory sulfide material bearing gold, silver or platinum.

19. The method of claim 17, wherein the refractory material includes a carbonaceous fraction.

20. The method of claim 17, wherein lime and/or limestone is added to a level of between about 100 to about 1200kg/tonne of solids ion the leaching solution and oxygen is introduced to a level of between about 200 to about 1000kg/tonne of solids in the leaching solution.

21. The method of claim 17, wherein the further leaching step uses cyanide as a lixivant.

22. Gold, silver or platinum recovered by the method of claim 18.

23. A method of recovering gold from a refractory material having a carbonaceous fraction, the method comprising grinding the ore to a particle size of 80% passing 25 micron or less, leaching the ground material with a solution comprising lime and/or limestone at a pH of between about 6 to about 12 in the presence of an oxygen containing gas, subjecting the leached material to a further leaching step in the presence of a cyanide and recovering gold from the cyanide leachate.

24. Gold recovered by the method of claim 23.

METHOD FOR TREATING PRECIOUS METAL BEARING MINERALS

FIELD OF THE INVENTION

5 The present invention relates to a process for leaching refractory sulphide and/or carbonaceous ores or concentrates and in particular is directed towards a method of recovering precious metals contained in the ores or concentrates.

10 BACKGROUND ART

 Gold is generally extracted from gold containing ores by treatment with a cyanide solution which solubilizes the gold. However, in some ores, the gold is present as microparticles encapsulated within the
15 ore. The gold in such ores cannot be extracted by traditional cyanidation techniques. These types of ores are known as refractory ores and are typically sulphide and/or carbonaceous ores. These ores may also contain, along with sulphides, other compounds of other Group VIA
20 elements such as Selenium and Tellurium.

 In order to extract gold from refractory sulfide ores, the ores must first be treated to liberate the gold so as to be accessible to cyanide leaching. A refractory ore is typically treated by oxidizing the ore
25 which results in the chemical destruction of the refractory component of the ore, liberating precious metals for subsequent recovery. Known methods of oxidising refractory ores include roasting, bacterially assisted leaching and leaching the ore at elevated
30 temperatures and pressure under acidic conditions.

 An example of such a process for treating sulphide ores is known as the Sherritt process which includes the steps of feed preparation, pressure oxidation in the presence of acid and oxygen,
35 solid/liquid separation, liquid neutralization and gold recovery from the oxidised solids by cyanidation. The operating conditions required in this process are at temperatures of between about 150°C to 210°C, a total

pressure of 2,100 kPa, a pulp density of 20% to 30% solids by mass, acid concentration of 20 - 100 g/L and a retention time of two to three hours. The oxidation must be carried out in an autoclave and requires a source of oxygen.

The capital costs associated with providing the autoclaves and meeting a high oxygen demand are high and may be prohibitive for construction at remote sites, for medium to small scale operations and for low grade ore.

It is possible to leach under less aggressive conditions but in this case, the leaching rates and recovery are too low to be economically viable.

Attempts have been made to reduce the aggressive conditions and to lower the pressures and temperatures required whilst maintaining the economic viability of refractory ore treatment processes. For example, Australian patent application no. 27182/92 describes subjecting an ore concentrate to fine grinding prior to leaching. Fine grinding to an 80% passing size of 15 micron or less enabled the leaching to be carried out under less aggressive conditions at temperatures of 95-110°C and pressures of about 1000 kPa.

Thus, whilst some progress has been made in reducing the operating parameters when using oxygen as the oxidant, the leach must still be carried out under pressure.

US5536480 also describes subjecting an ore to fine grinding prior to acid pressure leaching. In this case, the refractory sulfide ore contains carbonaceous material and the ore is ground to a particle size of 40 microns or less. It was found that in order to obtain an acceptable gold recovery it was necessary to oxidize the material at a minimum temperature of 200°C and to obtain a minimum sulfur oxidation of 96%.

It is also known to oxidatively leach mineral species with ferric ions under acidic conditions. Ferric ion is typically a more effective oxidizing agent than oxygen which means that oxidation with ferric ions can be

carried out under less aggressive conditions. Oxidative leaching at atmospheric pressure using ferric ions is known. A disadvantage of leaching with ferric ions is that the ferric ions are reduced to ferrous ions during the leaching reaction. As leaching solutions are recycled, therefore, ferric ions must be regenerated by oxidizing the reduced ferrous ions.

A further disadvantage with the aforementioned leaching processes for precious metal recovery is that they operate under acidic conditions. One difficulty with leaching under acidic conditions is that ores which contain an organic carbon fraction, known as carbonaceous ores cannot readily be processed to obtain acceptable levels of precious metal recovery. Precious metals such as gold are typically recovered from a leach solution by a cyanide leach stage. The reduction in recovery is due to absorption of the precious metals by the organics, during the cyanide stage. The absorbed metals cannot be recovered by cyanidation without a further pre-treatment stage designed to destroy the carbonaceous matter.

In order to address the problem of organic carbon, carbonaceous refractory ores are commonly treated by roasting to convert carbonaceous matter in the ores to gaseous carbon dioxide, or by treatment with a strong chemical oxidant, such as chlorine, to oxidize the carbonaceous matter. Both methods are expensive and are not economically viable for treatment of low grade materials.

Still further, as leaching steps such as cyanidation require alkaline conditions, the acid must be removed prior to cyanidation.

The problem of removing acid prior to cyanidation may be overcome by leaching under alkaline conditions. Leaching of nickel and cobalt under alkaline conditions using ammonia/ammonium salts is well known. However, a major disadvantage of alkaline leaching is that when iron containing ores such as pyrite are oxidised, the iron which is leached precipitates as a

passive iron oxide layer on the mineral particle. This layer inhibits further oxidation with the result being that the extent of leaching under alkaline conditions is less than under acidic conditions. This translates to a lower recovery of precious metals.

Still further, alkaline leaching of refractory materials requires elevated pressure and temperatures and an oxidant for the leaching to occur. However, even under aggressive alkaline conditions, recovery of precious metals is often less than that for acid leaching. Further, base metals such as copper and zinc are insoluble at high pH. Thus, alkaline leaching is unsuitable for leaching ores or concentrates where recovery of base metals from base metal sulphides such as chalcocite, sphalerite or chalcopyrite is required. For these reasons, commercial and academic interest has been directed towards acid leaching.

Most of the literature relating to alkaline leaching is directed towards the use of water soluble alkalis such as sodium or potassium hydroxide and ammonia. A disadvantage with these reagents is that iron is precipitated primarily as jarosite. Jarosite inhibits gold recovery and is also an environmentally unacceptable residue. Also, hydroxide reagents and in particular sodium hydroxide are prohibitively expensive.

The use of cheaper alkalis such as lime has been proposed. However, to date, leaching of iron sulphide materials with lime has been unsuccessful in that leaching is incomplete and subsequent precious metal recovery is low. For example, an earlier study of alkaline oxidation of pyrite for gold recovery using lime achieved only 30 to 40% gold recovery which offered little improvement over direct cyanidation of the pyrite. This is believed to be due to passivation of the mineral by precipitation of a gypsum/iron oxide layer.

Limestone is another alkali which is relatively cheap. Limestone is typically used in the neutralization of acidic leachates. However, limestone is considered to

be insufficiently reactive and/or soluble in alkaline systems to be able to be used for alkaline leaching.

From an economic point of view, it would be desirable to be able to leach refractory materials for
5 precious metal recovery under mild alkaline conditions and using reagents other than the expensive hydroxides.

As mentioned above, it is known that the oxidation rate under acidic conditions can be increased by fine grinding to increase the surface area of the
10 mineral particles. Such an increase may be predicted given that there is a larger surface area exposed to the oxidizing agents. However in the alkaline system, this effect is substantially reduced in view of the formation of the passive iron oxide layer on the particles. The
15 rate determining factors in the alkaline systems are believed to relate to the formation of the passivating iron oxide layer and diffusion of oxygen through the layer. Thus, workers in the field have concentrated on increasing the extent of alkaline leaching by using
20 strong, soluble alkalis, by modifying the leaching conditions so as to minimise formation of the passive layer and/or influence the diffusion rate through the layer.

One study suggests leaching at higher
25 temperatures or at relatively concentrated solutions of reagents. The reason for this is to rapidly produce a passive layer which is unstable and subject to cracking.

It is believed that at lower temperatures, the layers grow more slowly and are more stable. Another suggestion
30 has been to use additives which may react to dissolve the layer or to make the layer more permeable.

However, to date no method has been proposed which is able to economically leach iron containing refractory ores and concentrates under alkaline
35 conditions and which also enables good recovery of precious metals from the ore or concentrates.

The present invention is based on the surprising and unexpected discovery that leaching

refractory sulfide and/or carbonaceous materials under alkaline conditions can be successfully achieved by careful selection of the particle size of the material to be leached. Even more surprising it has been discovered that not only can the leaching efficiency be improved but that leaching can also be successfully conducted under relatively mild conditions. Still further, it has also been discovered that the activity of any carbonaceous matter in the feed material can also be substantially reduced as part of the oxidation process, to a point where it will not compete with the activated carbon added to commercial gold/silver recovery processes, where cyanide is used to leach the precious metals.

According to a first broad form of the invention there is provided a method of processing a mineral composition comprising a refractory material the method comprising milling the composition to a particle size of P_{80} of less than 25 microns and leaching said composition with a solution comprising lime and/or limestone in the presence of an oxygen containing gas.

In the present specification and claims the term "refractory material" includes refractory sulfides such as pyrite in which precious metals are encapsulated, ores which contain carbonaceous material and telluride or selenide materials. In the present specification and claims, the use of the term "ore" Includes not only ore per se but also includes concentrates, slimes, tailings, spoil and waste materials which may have a recoverable amount of precious metal values. Carbonaceous material refers to materials having an organic carbon fraction which may include graphite, bituminous or partly bituminous material.

The method of the present invention is particularly applicable to a composition including an iron containing refractory sulphide, selenide or telluride material or a mixture of such materials, with or without carbonaceous material present. Examples of such materials include pyrite, marcasite, arsenopyrite

and arsenic bearing pyrite, troilite and pyrrhotite.

According to a further broad form of the invention there is provided a method of processing a mineral composition comprising an iron containing refractory material the method comprising milling the composition to a particle size of P_{80} of less than 25 microns and leaching said composition with a solution comprising lime and/or limestone in the presence of an oxygen containing gas.

Other non-iron or minor iron containing materials may also be present in the composition, examples of which include stibnite, tetrahedrite, argentopyrite, calaverite, altaite, gold bearing selenides, tennantite and pentlandite. The method of the present invention is also applicable to a composition including carbonaceous matter, where the carbonaceous matter would otherwise interfere with the precious metals recovery process. Suitably the composition would not include economic amounts of base metal sulphides containing copper or zinc. Generally a composition which includes appreciable amounts of these base metals would not be treated directly by the method of the present invention. The reason for this is purely economical as copper and zinc precipitate under alkaline conditions and thus cannot be recovered easily. Under acidic leaching conditions, copper and zinc are solubilized and can be recovered by conventional SX/EW techniques. Use of flotation or other separation technologies to produce a base metal concentrate and a separate refractory iron sulphide concentrate would be obvious to one skilled in the art as a way of treating these materials.

The method of the present invention is in particular directed towards the treatment of refractory materials containing precious metals such as gold, silver and platinum. Suitably, the refractory materials are in the form of flotation concentrates although the method is suitable for ores if the economics are favourable.

In the method of the present invention, the

composition is finely ground to a particle size of 80 % by mass passing less than 25 μ m. A typical particle size range is between 80 % passing 2-25 μ m and preferably between about 80 % passing 5-15 μ m.

5 A preferred apparatus for producing the finely ground material is a stirred ball mill. However, it will be appreciated that several other suitable types of comminution apparatus may also be used.

10 The leaching is carried out using lime and/or limestone as the alkali reagent. Lime, limestone or a mixture thereof may be used. Preferably a mixture in the range of 40-95% limestone is used. The lime and/or limestone is added in an amount such that the pH of the system is between about 6-12 and preferably about 6-9.

15 Typically about 100 to about 1200kg, of lime and/or limestone is added per tonne of solids. The amount of lime and/or limestone which will need to added to maintain a desired pH will generally vary according to the amount (if any) of sulphuric acid produced by
20 sulphide oxidation. Generally about 800kg of lime and/or limestone would be added.

The present inventors have also surprisingly discovered that not only can the overall amount of leaching be increased but that such an increase can also
25 be obtained by leaching under milder conditions than has hitherto been possible. Suitably the method of the present invention can be carried out at ambient pressure. This avoids the use of expensive pressure reactors and autoclave equipment. The preferred operating temperature
30 is between about 50°C up to the boiling point of the mixture. Typically the maximum temperature is about 95°C.

The leaching reaction can thus be carried out in open tank reactors. Excess heat is removed by
35 evaporation of the solution. This avoids the need for costly heat exchangers. Heat can be easily introduced by known methods such as the injection of steam.

The leaching reaction is carried out in the

presence of an oxygen containing gas. When the reaction is carried out in an open tank reactor the gas is typically introduced by sparging. The gas may be oxygen, air or oxygen enriched air. The gas flow is dependent upon the amount of oxygen required to sustain the leaching reaction and is typically about 0.01 - 0.5 vvm (vessel volumes per minute). The oxygen consumption of the process is typically between about 200 - 1000kg of oxygen per tonne of solids.

After the composition has been leached, the mixture can be further treated by known methods to recover precious metals, principally by cyanide leaching.

Cyanidation occurs under alkaline conditions.

As the leach solution is already alkaline, the solution may be subjected directly to cyanide leaching. If desired the slurry may be thickened prior to cyanide leaching. A further advantage of the current invention is that the type of compounds that form in the alkaline leaching system are not reactive toward cyanide, and will not consume high levels of cyanide in the gold recovery stage. Compounds formed under acidic leach conditions often consume significant amounts of cyanide in the gold recovery stage, increasing the process costs.

According to a further broad form of the invention there is provided a method of recovering precious metals from a mineral composition comprising a refractory material, the method comprising;

grinding the material to a particle size of 80 % passing 25 μ m or less;

leaching the ground material in the presence of lime and/or limestone and an oxygen containing gas; and

subjecting the leached material to a further leaching step to recover any precious metals.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a flow diagram of a preferred method of the present invention and

Figure 2 is a flow diagram of a further preferred method of the present invention.

BEST MODE

Referring now to Figure 1, the ore or concentrate 10 is slurried to about 50% solids and fed into a stirred ball mill 11 and milled to a particle size of 80% passing 25 μm or less. The milled material is then fed into a non-pressurized reactor 12. Oxygen or air 14 is introduced into the reactor 12 and leaching is carried out at atmospheric pressure at a temperature of between about 50 to about 95°C. Lime and/or limestone 13 are added to the reactor 12 to control the pH to between about 6 and about 12. The leached material is then subjected to metals recovery 14.

Figure 2 illustrates a further flow diagram. This diagram is similar to that of Figure 1 and the same reference numerals have been used to identify the same steps or reagents. The process illustrated in this diagram further includes a thickener 15 which thickens the slurry following the leaching stage in reactor 12 prior to metals recovery 14. The excess solution 16 is returned to the mill 11 for reuse.

The present invention will now be described in relation to the following examples.

Example No. 1. Leach of a pyrite containing ore, with a 50:50 blend of limestone and lime, oxygen used as the oxidant.

Alkali Leach

The ore sample was slurried in tap water at 50% solids and milled in a laboratory rod mill for a period of 20 minutes to achieve a slurry ground to 80% passing 106 microns. The slurry was then thickened to 60% solids, and milled in a Netzsch horizontally stirred laboratory scale bead mill. The media used was 0.8 - 1.1mm steel balls. Slurry was passed through the mill sequentially to achieve the required grind size of 80% passing 14 microns. The final particle size distribution was determined by lasersizer.

The leaching test was carried out in a cylindrical stainless steel reactor fitted with four baffles located equidistant around the edges of the vessel. A 1,000 gram sample of the ground solids were added to the leach vessel along with 20 litres of tap water. The slurry was agitated by a 6 bladed Rushton style impeller. Oxygen was introduced to the reactor by an air spear, which terminated below the impeller. The oxygen flow was controlled by a rotameter at 2,000 cubic centimetres per minute (0.1 vvm).

The pH in the vessel was maintained by an automated pH analyser and controller, to a set point of 10. A combination glass pH probe was immersed in the slurry through a port in the lid of the reaction vessel. A limestone/lime slurry was continuously circulated from a stirred beaker through a ring main using a peristaltic pump. The limestone/lime slurry consisted of 50% lime and 50% limestone, at a slurry density of 35% w/w solids.

A solenoid valve was attached to the ring main, with an outlet line directed to the reaction vessel. The controller actuated the solenoid when the pH in the vessel drifted below the set point.

The vessel was heated by steam injection into a jacket surrounding the vessel. The steam injection was regulated by a solenoid valve, which was controlled by an automatic temperature controller. The vessel temperature was controlled to 85°C. The outside of the vessel was wrapped in insulated foam to prevent heat loss.

On completion of the test, the slurry was filtered and the filter cake dried and weighed. A sample of the filter cake was analysed for residual sulphide by acid evolution. A further sample of the cake was sent for XRD analysis to confirm the sulphide analysis. The dry weight of the filter cake was 1150 grams. The results of the sulphide oxidation step are listed below in Table 1.

Table 1

Degree of sulphide Oxidation Achieved for Whole Ore Leach

Sample	Weight - grams	% sulphide sulphur	% Pyrite by sulphide evolution	% Pyrite by XRD	% sulphide oxidation
Feed	1000	8.2	15.2	15.8	90.1
Leach Residue	1150	0.7	1.30	1.6	

- Example No. 2. Comparative leaching of a pyrite
5 containing concentrate, with a 80:20 blend of limestone
and lime and acid, oxygen used as the oxidant.

Alkali Leach

- The concentrate sample was milled according to
10 the procedure outlined in example 1, to achieve the
required grind size of 80% passing 9.6 microns.

- The leaching test was carried out in a 10 litre
cylindrical stainless steel reactor fitted with four
baffles located equidistant around the edges of the
15 vessel. A 2000 gram sample of the ground solids was
added to the leach vessel along with 10 L of tap water.

- The slurry was agitated by a 6 bladed Rushton
style impeller. Oxygen was introduced to the reactor by
an air spear, which terminated below the impeller. The
20 oxygen flow was controlled by a rotameter at 800 cubic
centimetres per minute (0.08 vvm).

A single addition of 2100 grams of limestone
and 380 grams of hydrated lime was made to the vessel at
the start of the test.

- The vessel was placed on a thermocouple
25 controlled hotplate, with the thermocouple immersed in
the slurry through a stainless steel sheath. The vessel
was maintained at the required temperature by the
thermocouple controller. The temperature was controlled
30 to 82°C.

On completion of the test, the slurry was
filtered and the filter cake dried and weighed. A sample

of the filter cake was analysed for residual sulphide. The dry weight of the filter cake was 4230 grams.

Acid Leach

5 The concentrate sample was milled according to the procedure outlined in Example 1, to produce a final product at 80 % passing 9.6 microns. The leaching test was carried out in a 10 litre cylindrical stainless steel reactor fitted with four baffles located equidistant
10 around the edges of the vessel. A 1400 gram sample of the ground solids was added to the leach vessel along with 10 L of tap water. The slurry was agitated by a 6 bladed Rushton style impeller. Oxygen was introduced to the reactor by an air spear, which terminated below the
15 impeller. The oxygen flow was controlled by a rotameter at 800 cubic centimetres per minute (0.08 vvm).

 A single addition of 100 grams of sulphuric acid and 250 grams of ferric sulphate hexahydrate was made to the vessel at the start of the test. The
20 vessel temperature was controlled to 82°C. On completion of the test, the slurry was filtered and the filter cake dried and weighed. A sample of the filter cake was analysed for residual sulphide. The dry weight of the filter cake was 1812 grams.

25 The results of the sulphide oxidation steps are listed below in Table 2.

Table 2
Degree of Sulphide Oxidation Achieved for Pyrite
Concentrate

Sample	Weight - grams	% sulphide sulphur	% sulphide oxidation
Alkaline Leach			
Feed	2000	42	88.5
Leach	4230	2.3	
Residue			
Acid Leach			
Feed	1400	42	74.7
Leach	1812	8.2	
Residue			

Cyanide Leach

A sample of each leach residue and the un-oxidised feed material were slurried in tap water at a slurry density of 40% w/w solids in a baffled glass reactor. The volume of the reactor was 3 litres. The slurry was agitated by a 6 bladed Rushton downdraft style impeller. Air was introduced to the reactor by the action of the downdraft impeller.

The pH of the slurry was adjusted and maintained at pH 10 using lime, and sodium cyanide was added to the slurry to maintain a free cyanide level of 500ppm. The test was carried out for a period of 24 hours. On completion of the test, the slurry was filtered and the filter cake washed with deionised water.

The filtrate and washings were combined for analysis. The solid filter cake was dried in an oven and analysed to determine the precious metals recovery. The results of the cyanide leach are listed in Table 3.

Table 3.
Cyanide Leach Results for Oxidised Pyrite Concentrate

Sample	% pyrite oxidised	Gold Extraction %	Sodium Cyanide consumed - kg/tonne
Feed prior to oxidation	NA	26.6	4.5
Acid Oxidised Residue	74.7	72	11.7
Alkaline Oxidised Residue	88.5	94	3.6

5 The precious metals extractions were determined
by head and tails fire assay.

Example No. 3. Leach of a pyrite containing concentrate,
with a 80:20 blend of limestone and lime, air used as the
10 oxidant.

Alkali Leach

The concentrate sample was milled according to
the procedure outlined in example 1, to achieve the
required grind size of 80% passing 12 microns. The final
15 particle size distribution was determined by lasersizer.

The leaching test was carried out in a
cylindrical stainless steel reactor fitted with four
baffles located equidistant around the edges of the
vessel. A 200 gram sample of the ground solids were
20 added to the leach vessel along with 2,000mL of tap
water. The live volume of the reactor was 2.5 litres.

The vessel was fitted with a stainless steel lid to prevent evaporative loss from the reactor. The slurry was agitated by a 6 bladed Rushton style impeller. Air was introduced to the reactor by an air spear, which terminated below the impeller. The air flow was controlled by a rotameter at 200 cubic centimetres per minute (0.1 vvm).

The pH in the vessel was maintained using the same system described in Example 1, with the exception that the limestone/lime slurry consisted of 20% lime and 80% limestone, at a slurry density of 35% w/w solids.

The vessel was placed on a thermocouple controlled hotplate, with the thermocouple immersed in the slurry through a stainless steel sheath. The vessel was maintained at 85°C by the thermocouple controller.

On completion of the test, the slurry was filtered and the filter cake dried and weighed. A sample of the filter cake was analysed for residual sulphide by acid evolution. The dry weight of the filter cake was 469 grams. The results of the sulphide oxidation step are listed below in Table 4.

Table 4
Degree of Sulphide Oxidation Achieved for Pyrite
Concentrate when oxidised with Air as the Oxidant

Sample	Weight - grams	% sulphide sulphur	% Pyrite by acid evolution	% sulphide oxidation
Feed	200	33.2	61.73	90.1
Leach Residue	469	1.4	2.6	

Example No. 4. Leach of an arsenopyrite containing concentrate, with a 50:50 blend of limestone and lime, oxygen used as the oxidant.

5 Alkali Leach

An arsenopyrite concentrate, grading 10.73 % arsenic and 32 % sulphur was tested for gold recovery. The concentrate sample was milled according to the procedure outlined in example 1, to achieve the required
10 grind size of 80% passing 14 microns. The final particle size distribution was determined by lasersizer.

The leaching test was carried out according to the procedure outlined in Example 1. A 1500 gram sample of the ground solids were added to the leach vessel. The
15 pH in the vessel was maintained according to the method outlined in Example 1.

On completion of the test, the slurry was filtered and the filter cake dried and weighed. A sample of the filter cake was analysed for residual sulphide by
20 acid evolution. A further sample of the cake was sent for XRD analysis to confirm the sulphide analysis. The dry weight of the filter cake was 2965 grams. The results of the sulphide oxidation step are listed below in Table 5.

25

Table 5
Degree of Sulphide Oxidation Achieved for Arsenopyrite Concentrate

Sample	Weight grams	% sulphide sulphur	% Arsenopyrite by XRD	% Pyrite by XRD	% sulphide oxidation
Feed	1500	20.1	30.6	29.5	93.1
Leach	2965	0.7	<1	1.4	
Residue					

The presence of arsenic as ferric arsenate in the leach
30 residue was confirmed by XRD

Cyanide Leach

The cyanide leach procedure was the same as outlined for Example 2. The results of the cyanide leach are listed in Table 6.

5

Table 6.
Cyanide Leach Results for Oxidised Pyrite and
Arsenopyrite Concentrate

Sample	% pyrite oxidised	% arsenopyrite oxidised	Gold Extraction %
Feed	NA	NA	35.8
Oxidised Residue	90.6	>95	88.05

10

The precious metals extractions were determined by head and tails fire assay.

Example No. 5. The Effects of Varying Alkali Mixtures on
the Extent of Sulphide Oxidation

15

Alkali Leach

Approximately 5 kg of pyrite concentrate was milled according to the procedure outlined in example 1, to achieve the required grind size of 80% passing 8.6 microns. The final particle size distribution was determined by lasersizer. On completion of the grind, the ground slurry was split into 500 gram subsamples for the leaching test, and each subsample filtered separately. All subsamples were stored frozen to prevent oxidation of the pyrite.

20

A 200 gram sample was split out of each subsample for the leaching testwork. The leaching test was carried out according to the procedure outlined in Example 3. A 200 gram sample of the ground solids was used for the test. The pH in the vessel was maintained using the same system described in Example 1.

25

30

The limestone/lime slurry composition was varied for the three leach tests according to the following ratios: 100% lime, 50% lime 50% limestone, 10% lime 90% limestone. The vessel temperature was controlled to 85°C. On completion of the test, the slurry was filtered and the filter cake dried and weighed. A sample of the cake was sent for XRD analysis to determine the extent of pyrite leaching. The dry weight of the filter cake was recorded.

The results are listed in Table 7, below

Table 7.
The Effects Of Varying Lime/Limestone Blends On The
Extent Of Pyrite Oxidation From Pyrite Flotation
Concentrate

Alkaline Leach Tests			
PH	10	10	10
Alkali mixture	100% lime	50% lime 50% limestone	10% lime 90% limestone
Grind Size - 80% passing	8.6	8.6	8.6
% solids	10.0	10.0	10.0
Feed data:			
Dry solids wt g	200	201.0	201.1
% pyrite in head	65.0	65.0	65.0
Residue data:			
% pyrite in residue	3.2	3.0	1.0
% pyrite oxidised from XRD	95.47	90.1	94.3

Example No. 6. The Effects of Varying Grind Size on the Extent of Sulphide Oxidation.

Alkali Leach

- 5 Approximately 4 kg of pyrite concentrate sample was milled according to the procedure outlined in example 1, to produce 6 individual samples at the required grind sizes of 80% passing:

10	Pass1	51.9 microns
	Pass2	32.04 microns
	Pass3	17.94 microns
	Pass4	13.64 microns
	Pass5	11.71 microns
15	Pass6	8.6 microns

- On completion of the grind, the ground slurry was split into 500 gram subsamples for the leaching test, and each subsample filtered separately. All subsamples
20 were stored frozen to prevent oxidation of the pyrite.

- A 200 gram sample was split out of each subsample for the leaching testwork. The leaching tests were carried out according to the procedure outlined in Example 3. The pH in the vessel was maintained using the
25 system described in Example 1. The vessel temperature was controlled to 80°C. On completion of the test, the slurry was filtered and the filter cake dried and weighed. A sample of the cake was sent for XRD analysis to determine the extent of pyrite leaching. The dry weight of the
30 filter cake was recorded.

The results are listed in Table 8, below

Table 8.
The Effects of Varying Grind Size on the Extent of Pyrite
Oxidation from Pyrite Flotation Concentrate

5

Alkaline Leach Tests						
pH	10	10	10	10	10	10
Alkali mixture	100%	100%	100%	100%	100%	100%
	lime	lime	lime	lime	lime	lime
Grind Size - 80% passing	51.9	32.04	17.94	13.64	11.71	8.6
% solids	10.0	10.0	10.0	10.0	10	10.0
Feed data:						
Dry solids wt g	200.0	200	200	200	200	200
% pyrite in head	65.0	65.0	65.0	65.0	65.0	65.0
Residue data:						
% pyrite in residue	16.7	9.7	7	2.7	3.7	3.2
% pyrite oxidised from XRD	73.9	80.1	91.06	96.81	95.54	95.47
% additional gold recovery	0	4	8	12	14	14

Example No. 7. Leach of a pyrite containing concentrate,
 with a 50:50 blend of limestone and lime with oxygen used
 as the oxidant, at varying pH.

Alkali Leach

The concentrate sample was milled according to
 the procedure outlined in example 1, to achieve the
 required grind size of 80% passing 12 microns. All
 leaching tests were carried out according to the
 procedure outlined in Example 2.

The pH in the vessel was maintained by an automated pH analyser and controller. In all, three tests were carried out, each at a different pH. The pH control points used were

Test 1	pH 8
Test 2	pH 9
Test 3	pH 10

The limestone/lime slurry consisted of 50% lime and 50% limestone, at a slurry density of 35% w/w solids. The vessel temperature was controlled to 85°C.

On completion of the test, each slurry was filtered and the filter cake dried and weighed.

Table 9.

Degree of oxidation of Pyrite at Varying pH

Control pH	Not oxidised	Oxidised at pH 8	Oxidised at pH 9	Oxidised at pH 10
% sulphur oxidation	<10	90	94	94

Cyanide Leach

The cyanide leach procedure was the same as outlined for Example 2. The results of the cyanide leach are listed in Table 10.

Table 10.
Gold Recoveries from Oxidised Pyrite concentrate at
Varying pH

Control pH	Not oxidised	Oxidised at pH 8	Oxidised at pH 9	Oxidised at pH 10
Au recovery - %	26.6	92.2	96.1	97.2

The precious metals extractions were determined by head and tails fire assay.

Example No. 8. Leach of a pyrite concentrate containing high levels of carbonaceous matter.

5 Alkali Leach

A 1200 gram sample of concentrate containing approximately 18 % w/w pyrite and 21.8 % w/w organic carbon was produced by flotation of a carbonaceous ore sample with diesel. The concentrate sample was milled according to the procedure outlined in Example 1, to achieve the required grind size of 80% passing 9 microns

The leach test was carried out according to the procedure outlined in Example 3, using a 120 gram sample of the ground concentrate. A single addition of 40 grams of hydrated lime and 160 grams of limestone was made to the leach at the start of the leach test, and the slurry allowed to react for 24 hours. The vessel temperature was controlled to 85°C. On completion of the test, the slurry was filtered and the filter cake dried and weighed.

Gold Adsorption Tests

A 20 ppm gold in cyanide solution was made up in de-ionised water. The free cyanide level in the solution was 500 ppm.

A 20 gram sample of the oxidised concentrate was added to 500 mL of the gold cyanide solution, and the solution agitated by magnetic stirrer. The solution was sampled regularly over a period of 75 minutes. A 20 gram sample of the ground concentrate, which had not been subjected to oxidative leaching, was also added to 500 mL of gold cyanide solution, and the solution agitated by magnetic stirrer. The solution was also sampled regularly over a period of 70 minutes.

All solution samples were analysed for gold by DIBK extract/AAS. The results of the gold adsorption tests are listed below in Table 11

Table 11

Effect of Oxidative Alkaline Leaching on the Activity of Carbonaceous Material.

Time (min)	Gold in Solution (ppm)	
	Alkaline leach residue	Ground Concentrate
0	17.4	15.9
1	15.2	11.4
5	15.2	10.2
10	14.9	9.65
20	14.8	9.20
50	14.6	9.10
70	15.4	-
75	-	9.20

Example No. 9. Leach of Electrolytic Copper Refinery Slimes Containing Gold And Silver Selenides and Tellurides.

Alkali Leach

A 1500 gram sample of Electrolytic Copper Refinery Slimes, assaying 16.2% Cu, 8400g/t Au, 7.8% Ag, 0.24% Te, 2.45% Se, was milled according to the procedure outlined in Example 1, to 80% passing 9 microns.

Copper Refinery Slimes contain gold and silver in the form of telluride and selenides. Typical constituents of the slimes include phases with the composition (Cu,Ag)₂Se and (Cu,Ag)₂Te. These phases do not leach in conventional cyanide leach circuits.

The leach test was carried out according to the procedure outlined in Example 2. A 570 gram sample of the ground slimes was added to the leach vessel along with 8 L of tap water. A single addition of 380 grams of hydrated lime and 1520 grams of limestone was made to the leach at the start of the leach test, and the slurry allowed to react for 24 hours. The vessel temperature was controlled to 85°C. On completion of the test, the slurry was filtered and the filter cake dried and weighed.

Cyanide leaching Tests

Two cyanide leaching tests were carried out. The cyanide leach procedure was the same as outlined for Example 2. The results of the cyanide leach are listed in Table 12.

Table 12.**Gold Recoveries from Copper Refinery Slimes**

	Alkaline Leached slimes	Non Alkaline Leached Slimes
Gold Extraction	92	46.5

Gold recovery from the alkaline leached slimes was significantly higher than for the fresh slimes, indicating that the gold bearing selenide and telluride phases present in the slimes were broken down in the alkaline leach.

Example No. 10. Leach of a Stibnite (Sb_2S_3) concentrate.**Alkali Leach**

A 250 gram sample of concentrate containing 40 % w/w Sb_2S_3 and 60 % w/w siliceous gangue was slurried in tap water at 60% solids, and milled in an ECC vertically stirred laboratory mill. Slurry was milled to achieve the required grind size of 80% passing 12 microns. The final particle size distribution was determined by lasersizer.

The leach test was carried out according to the procedure outlined in Example 3. A 200 gram sample of the ground concentrate was used in the test.

A single addition of 30 grams of hydrated lime and 120 grams of limestone was made to the leach at the start of the leach test, and the slurry allowed to react for 24 hours. The vessel temperature was controlled to 85°C. On completion of the test, the slurry was filtered and the filter cake dried and weighed. The results of the oxidation test are listed in Table 12, below.

Table 12
Oxidation of finely ground Stibnite (Sb₂S₃) with
lime/limestone under alkaline conditions.

Sample	Weight	% sulphide	% sulphide oxidation
Feed concentrate	200	9.43	87
Oxidised Residue	326.9	0.76	

5

It can be seen that by grinding to 25 μ m or less and leaching under alkaline conditions with lime and/or limestone that 90% or more of the refractory components of the feed can be oxidised. A high level of oxidation typically translates to high precious metal recovery. However, for some ores or concentrates a high level of gold recovery can be achieved with comparatively low levels of sulfide oxidation. When processing such ores or concentrates according to the invention, typically only, as much sulfur as required would be oxidized to obtain a desired level of gold recovery.

The high degree of oxidation of the minerals which can be achieved as a result of the present invention sets it apart from other processes where air and lime are added to sulphide slurries prior to cyanide leaching. In these other processes, the addition of air to a level of about 10-20 kg/tonne solids and lime, to a level of only 5 - 20 kg/tonne of solids, is designed to remove soluble ions from the solution phase of the slurry that may impact adversely on the cyanide leach stage. The current invention, on the other hand, substantially breaks down the solid phase of the slurry, liberating encapsulated gold for recovery through cyanide leaching, with much higher consumption of lime and or limestone.

The methods of the present invention offer a number of advantages over existing methods. First, iron containing refractory ores such as pyrite and

arsenopyrite can be oxidised to high levels under alkaline conditions using lime and/or limestone as the alkali source. Selenides and Tellurides present in these feeds are broken down in the process and the activity of any carbonaceous matter in the feed is substantially reduced. Lime and limestone offer significant economic advantages over the known agents such as caustic. For example, current costs for caustic are about AUD\$440 per tonne, ammonium based salts, about AUD\$450, lime AUD\$100-200 and limestone AUD\$15-41/tonne.

Further, the leach need not be pressurized, which translates to significant capital and operating costs. Still further, costs can be reduced as the leach can be carried out using air instead of oxygen. This means that oxygen need not be purchased or produced. Further economic benefits can be realized as the cyanide consumption of residues leached by the present method is less than that for residues leached under acidic conditions.

The leach residence times for the preferred methods of the present invention are typically about 12 - 30 hours. These residence times compare favorably to oxidative leaching under acidic conditions and are in fact superior to atmospheric ferric leaching.

Further, leaching under the condition of the present invention inactivates any carbonaceous material which allows precious metals to be recovered by cyanide lixivation.

During the leaching iron precipitates as goethite and hematite, rather than Jarosite as occurs under acidic conditions. Jarosite inhibits subsequent precious metal recovery by making the residue difficult to settle and filter. Further, Jarosite is not an environmentally acceptable residue.

Gypsum is also formed during the leach and precipitates. An advantage of gypsum is that it enhances the filterability of the residue. Gypsum is not formed when using conventional alkali reagents.

Another advantage over the use of the water soluble alkali reagents is that in the present invention arsenic present in the refractory material is precipitated as ferric arsenate. The level of arsenic in the leach liquor is typically below detectable limits. When using conventional soluble alkalis arsenic is present in the leach liquor.

The process of the present invention has enabled recovery of precious metals from sulfide and/or carbonaceous ores under (1) conditions of temperature and pressure which were previously believed to be insufficiently reactive for such ore materials, (2) the use of alkaline reagents which were also previously believed to be insufficiently reactive and/or soluble and (3) under pH conditions which were previously believed to lead to passivation and incomplete oxidation of the ore particle.

In the present specification and claims, the term "comprise" and variations such as "comprises" and "comprising" or the term "include" or variations thereof will be understood to imply the inclusion of a stated element or integer or a group of integers or elements, but not the exclusion of any other element or integer or group of elements or integers.

CLAIMS

1. A method of processing a mineral composition comprising a refractory material the method comprising milling the composition to a particle size of P_{80} of less than 25 microns and leaching said composition with a solution comprising lime and/or limestone in the presence of an oxygen containing gas.
2. The method of claim 1, wherein the refractory material is selected from the group comprising an iron containing sulfide ore, a refinery slime, a carbonaceous ore, a selenide and a telluride.
3. The method of claim 1, wherein the refractory material is selected from the group consisting of pyrite, marcasite, arsenopyrite, troilite, pyrrhotite stibnite, tetrahedrite, argentopyrite, calaverite, altaite, gold bearing selenides, tennantite and pentlandite.
4. The method of claim, whereon the refractory material is pyrite or arsenopyrite.
5. The method of claim 2, wherein the material is leached at atmospheric pressure.
6. The method of claim 5 wherein the material is leached in an open tank reactor.
7. The method of claim 2, wherein the material is leached at a temperature of about 50°C up to about the boiling point of the solution.
8. The method of claim 5, wherein the oxygen containing gas is oxygen and the oxygen is introduced into the leaching solution to a level of between about 200 to about 1000kg/tonne of solids in the leaching solution.
9. The method of claim 8, wherein the oxygen is introduced into the leaching solution at a flow rate of between about 0.1 to about 0.5vvm.
10. The method of claim 1, wherein the particle size is between about 2 to about 25 microns.
11. The method of claim 1, wherein the particle size is between about 5 to about 15 microns.
12. The method of claim 1, wherein the solution has a pH

of the solution is between about 6 to about 12.

13. The method of claim 1, wherein the solution has a pH of between about 6 to about 9.

14. The method of claim 13, wherein the leach
5 solution comprises a mixture of lime and limestone and wt% of limestone in the mixture is between about 40 to about 95%.

15. The method of claim 14, wherein the amount of lime and/or limestone added to the leach solution is
10 between about 100 to about 1200kg/tonne of solids in the solution.

16. The method of claim 15, wherein the amount is about 800kg/tonne.

17. A method of recovering precious metals from a
15 mineral composition comprising a refractory material, the method comprising;

grinding the material to a particle size of 80%
passing 25 μ m or less;

leaching the ground material in the presence of
20 lime and/or limestone and an oxygen containing gas; and
subjecting the leached material to a further
leaching step to recover any precious metals.

18. The method of claim 17, wherein the refractory
material is a refractory sulfide material bearing gold,
25 silver or platinum.

19. The method of claim 17, wherein the refractory
material includes a carbonaceous fraction.

20. The method of claim 17, wherein lime and/or
limestone is added to a level of between about 100 to
30 about 1200kg/tonne of solids ion the leaching solution
and oxygen is introduced to a level of between about 200
to about 1000kg/tonne of solids in the leaching solution.

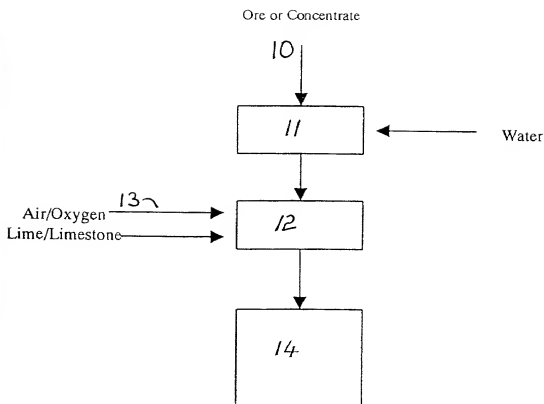
21. The method of claim 17, wherein the further
leaching step uses cyanide as a lixiviant.

35 22. Gold, silver or platinum recovered by the
method of claim 18.

23. A method of recovering gold from a refractory
material having a carbonaceous fraction, the method

comprising grinding the ore to a particle size of 80% passing 25 micron or less, leaching the ground material with a solution comprising lime and/or limestone at a pH of between about 6 to about 12 in the presence of an oxygen containing gas, subjecting the leached material to a further leaching step in the presence of a cyanide and recovering gold from the cyanide leachate.

24. Gold recovered by the method of claim 23.

*Fig. 1*

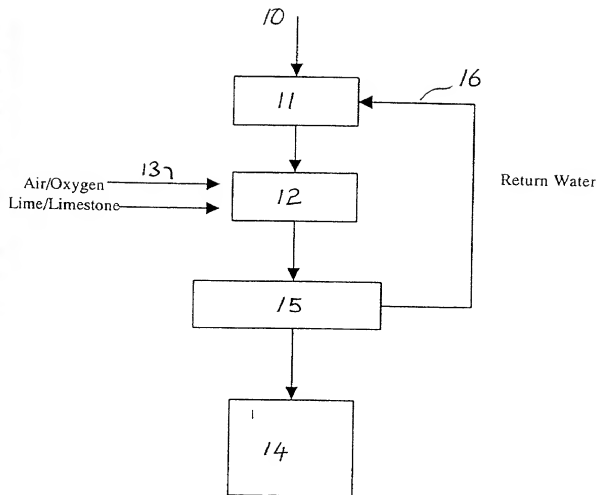


Fig. 2

Fax sent by : 0732626569
FAX 11/05/01 13:24A4-A4 11/05/01 15:49 Pg: 2/5
11/05/01 13:24

US

PCT Applicant's Guide - Volume II - National Chapter - US

Annex US.III, page 1

Please type a plus sign (+) inside this box → +

PTO/BB1 (10-97)

Approved for use through 8/30/02. OVER 988-0005

Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**DECLARATION FOR UTILITY OR
DESIGN
PATENT APPLICATION
(37 CFR 1.63)**☒ Declaration
Submitted
with Initial
Filing

OR

☐ Declaration
Submitted after Initial
Filing (surcharge
(37 CFR 1.16 (e))
required)

Attorney Docket Number

First Named Inventor

COMPLETE IF KNOWN

Application Number

Filing Date

Group Art Unit

Examiner Name

As a below named inventor, I hereby declare that:

My residence, past office address, and citizenship are as stated below next to my name.

I declare I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Michael Matthew ROURN

The specification of which

(Title of the invention)

☐ is submitted hereto
OR☒ was filed on (MM/DD/YYYY) 09/20/1999

as United States Application Number or PCT International

Application Number PCT/AU99/00798 was transmitted on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as submitted by my representative specifically referred to above.

I acknowledge my duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under all U.S.C. 119(a)-(d) or 35(a)(3) of any foreign application(s) for patent or inventor's certificate, or both (a) of any PCT International application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application (Number(s))	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?
PP6025	AU	09/21/1998	<input type="checkbox"/>	<input type="checkbox"/>
PP6313	AU	10/06/1998	<input type="checkbox"/>	<input checked="" type="checkbox"/>

☒ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/GB02B attached hereto.

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)

☐ Additional provisional application numbers are listed on a supplemental priority data sheet PTO/GB02B attached hereto.

(Page 1 of 1)

DURIN THIS STATEMENT: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

(July 1998)

Fax sent by : 0732626569
 Fax from : 61 7 3229 3384

A4-A4 11/05/01 15:48 Pg: 3/5
 11/05/01 15:04 Pg: 3/5

US

Annex 1/5 III page 2

PCT Applicant's Guide - Volume II - National Chapter - US

Patent form a plus sign (+) inside this box ☒

PTC/88/01 (12-97)

Approved for use through 03/02/02. OMB 0551-0001

Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE
 a valid OMB control number.**DECLARATION --- Utility or Design Patent Application**

I hereby claim the benefit under 35 U.S.C. 100 of any United States application, or 35 USC of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of such of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.55 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02A attached hereto.

As a named inventor, I hereby assign the following right(s) and process(es) to prosecute this application and to transfer all business in the Patent and Trademark Office connected therewith: ☐ Customer Number ☐ OR ☐ Registered practitioner(s) name(s)/attorney number listed below ☐ Place Customer Number Bar Code Label/Note

Name	Registration Number	Name	Registration Number

☐ Additional registered practitioner(s) named on supplemental Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☐ Customer Number or Bar Code Label ☐ OR ☐ Correspondence address below

Name			
Address			
Address			
City	State	ZIP	
Country	Telephone	Fax	

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true and further that those statements were made with the knowledge that willful false statements and the like are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor: ☐ A petition has been filed for this assigned inventor

Giving Name first and middle initial Family Name or Surname

Michael Matthew BOURN

Inventor's Signature *M. H.* Date

Residence: City CARINDALE State QLD Country AU Citizenship AU

Real Office address 14 Kinrade Place *Plus*

Post Office address

City State ZIP Country

☐ Additional inventor(s) are being named on the supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

(Page 2 of 2)

Fax sent by : 873262559
Fax from : 81 7 3229 3384A4-A4 11/05/01 15:48 Pg: 4/5
11/05/01 15:48

004

US

PCT Applicant's Guide - Volume II - National Chapter - US

Annex US.III, page 3

Please type a plus sign (+) inside the box → ☐

PTO/SEA (2-87)

Approved for use through 5/20/96, CUB 001-0002

Under the Patent and Trademark Act of 1995, no person is required to respond to a collection of information unless it carries a valid OMB control number.
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

DECLARATION	ADDITIONAL INVENTOR(S) Supplemental Sheet Page <u> 4 </u> of <u> 4 </u>
--------------------	--

Name of Additional Joint Inventor, if any: ☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))

Family Name or Surname

Rodrigo Ulap

VENTURA

Inventor's Signature

Date

11/05/01

Residence: City

SUNNYBANK HILLS

State

QLD

Country

AU

Citizenship

AUL

Post Office Address

30 Hildale Street

Post Office Address

City

State

ZIP

Country

Name of Additional Joint Inventor, if any: ☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))

Family Name or Surname

John Anthony

WILLIS

Inventor's Signature

Date

11/05/01

Residence: City

SUNNYBANK HILLS

State

QLD

Country

AU

Citizenship

AUL

Post Office Address

36 Chancellor Street

Post Office Address

City

State

ZIP

Country

Name of Additional Joint Inventor, if any: ☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))

Family Name or Surname

David

WINBORNE

Inventor's Signature

Date

11/05/01

Residence: City

MITCHELTON

State

QLD

Country

AU

Citizenship

AUL

Post Office Address

65 Elbury Street

Post Office Address

City

State

ZIP

Country

Notarize this Statement: This form is submitted to take effect to establish. Type and verify depending upon the needs of the individual case. Any documents on the subject of time you are required to complete the form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND PAGES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

(July 1998)